

# Compact Motorized Polarizer Holder

OSMS-60W

RoHS

Catalog  
code


W4154

Automatically rotating the polarizer (30mm outer diameter, 2.5-8.3mm thickness).

Utilizing our OSMS-60YAW motorized rotation stage to realize high accuracy rotation alignment.




アダプタ単体

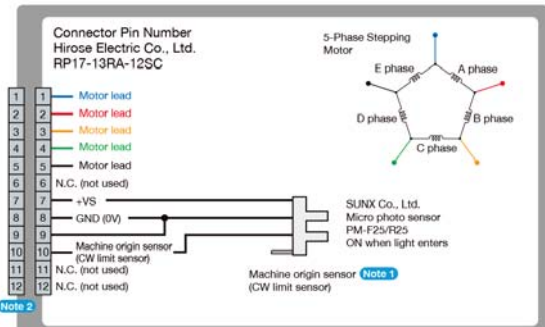

**Note 1** When a travel command in the "+" direction is issued, the mounting table rotates to ∞ in the CCW (counterclockwise) direction viewed from the top surface, but it is stopped by the machine origin sensor (CW limit sensor) in the CW (clockwise) direction. Detect the machine origin using the method (MINI system) that detects the origin with a machine origin sensor (CW limit sensor).

**Note 2** Compatible cable connector: Hirose Electric Co., Ltd. RP17-13PA-12PC/RP17-PC-122

## Rotation Range

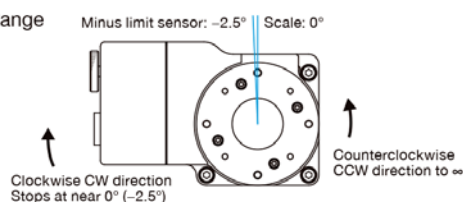

Can be operated with our controller (see below the table)

## Guide

- Adapters, which are available individually, can be easily installed onto the mounting surface of stage (OSMS-60YAW or discontinued SGSP-60YAW-0B). The optics is secured using retaining ring.
- To secure the optics, a retaining ring spanner is required.
- Please contact us for installation onto other automatic rotation stages.
- Please contact us for mounting prisms with different sizes.

## Specifications

Part Number	OSMS-60-WPQ-30	OSMS-60-WHD-30
JP Yen [¥]	95,500	7,000
Product Name	Compact Motorized Polarizer Holder	Adapter for Waveplate
Composition	OSMS-60YAW + OSMS-60-WHD-30 + RO-12-60	—
Compatible Optics Diameter [mm]	φ30	
Compatible Optics Thickness [mm]	2.5~8.3	
Weight [kg]	0.53	0.08

## Compatible Controller / Cable

Compatible Controller	GSC-01, GSC-02, SHOT-702, GIP-101, SHOT-302GS, SHOT-304GS, HIT-M · HIT-S, PGC-04-U, HSC-103
Compatible Cable	D15RP-CA

## OSMS-60YAW Specifications


Rotation Range	Move in the counterclockwise CCW direction to ∞, and stop at near 0 degree (-2.5°) in the clockwise CW direction.
Resolution [°/pulse]	(Full)0.005° (Half)0.0025°
MAX Speed [°/sec]	30

Please check our website for details about OSMS-60YAW. W9027

Catalog  
code


## Outline Drawing

### OSMS-60-WPQ-30

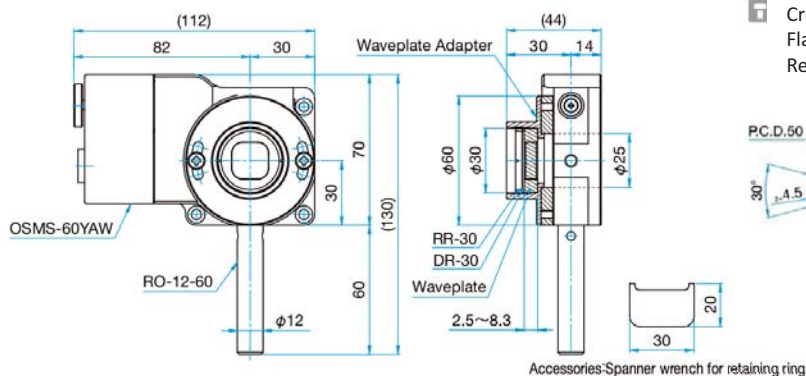

### OSMS-60-WHD-30

- Spanner wrench for retaining ring × 1 piece,
- Cross recessed pan head screw M4 × 8...2 screws,
- Flat washer for M4...2 Pieces,
- Retaining Ring φ30...1 piece, Delrin Ring 30 × 27 × 1...1 piece

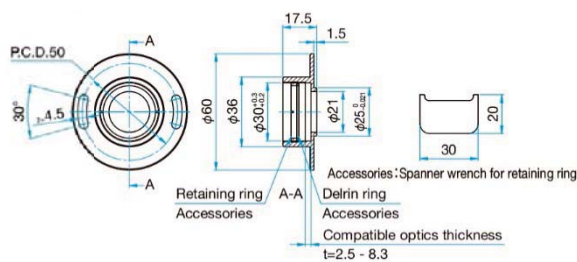

**HOURS**  
www.hours-web.com

OSMS-60W-E1902