

It is compatible with our observation unit with coaxial illumination (OUCI-2) and can be fixed in place.

- Application System
- Machine Vision
- Manual Positions
- Motion Control Products
- Optical & Mirror Holder
- Optomechanics
- Holders
- Factory Automation Parts
- Measurement & Control
- FA Electrical Parts
- Laser
- Tools & Clean Parts




- The four holes allow installation of objectives with different magnification to increase operating efficiency.

**Attention**

- No centering mechanism for objective.
- Please be noted that we do not provide investigation of AIS environmental control substances.

**Outline Drawing**

MLT-4H

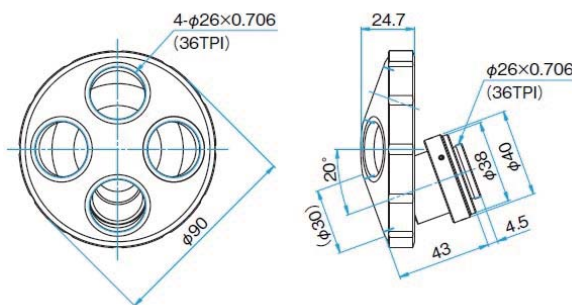

**Installation (for reference)**



- Imaging Systems & Components
- Dimension Measurement System
- Functional Analysis System
- Electrophysiology
- Educational Products and Kits
- Bio-photonics
- Laser Processing/ Coupling
- FA Standard Machine
- Custom-Built Systems

Specifications	
Part Number	MLT-4H
Observation Method	Bright field Observation
Number of switched lens	4 Holes (spaced at 90 degree intervals)
Compatible Objective Thread ( threads per inch)	φ26×0.706 (36)
Compatible Barrel Thread ( threads per inch)	φ26×0.706 (36)
Weight [kg]	0.57