

Single axis controller with built-in micro-step driver and 5 buttons for quick access to memorized locations.

- Compatible with objective lens turrets, motorized zoom lens and other LASER accessory units in addition to motorized stages fitted with 5-phase stepping motor.



Guide

- Sample programs are available for download from our website.
 - SG Sample 32/64-bit version for Windows® (only for RS232C)
 - LabVIEW for RS232C (for v.5.1/v.6i/v7.1/v.8.6/v.2010/v.2012/v.2013/v.2014/v.2015)

Part Name	Part Number
Intelligent Positioning System	GIP-101

Primary Functions

Controller Function	○
Number of Control Axes	1
Stored Program Control	—
Feedback Control	—
Circular Interpolation Control	—
Linear Interpolation Control	—
Driver Function	Micro-step
Micro-step (Max. Division)	250
Driving Current (A/phase)	0.23 – 0.75

General Specifications

Power Voltage	AC100 – 240V 50/60Hz
Power Consumption	100VA
Operating Temperature	0 – 40°C
Storage Temperature	—
Ambient Humidity	20 – 80%RH (without condensation)
External Dimensions (WxHxDmm)	145x205x81
Weight (kg)	2

Interface

GP-IB	—
RS232C	○
USB	—
Ethernet	—

Performance Specifications

Coordinate Indication Range	—
Max. Travel to Set	16,777,214
Max. Driving Speed (pps)	22,000
Min. Driving Speed (pps)	50
Acceleration/Deceleration Time (ms)	20 – 1,000 16 steps


I/O Specification

Origin Sensor	○
Proximity Sensor	○
CW (+) Limit	○
CCW (-) Limit	○
General Purpose Input	—
General Purpose Output	—
Control Input	6 points
Control Output	1 point
Trigger Output	—

Control Command

Machine Origin Return	○
Theoretical Origin Setting	○
Relative Position Drive	○
Absolute Position Drive	○
Jog Operation	○
Position Appointment	○
Circular Interpolation Control	—
Linear Interpolation Control	—
Drive	○
Deceleration Stop	○
Emergency Stop	○
Speed Setting	○
Motor Free/Hold	○
Port Input	○
Port Output	○

GIP-101 System Chart

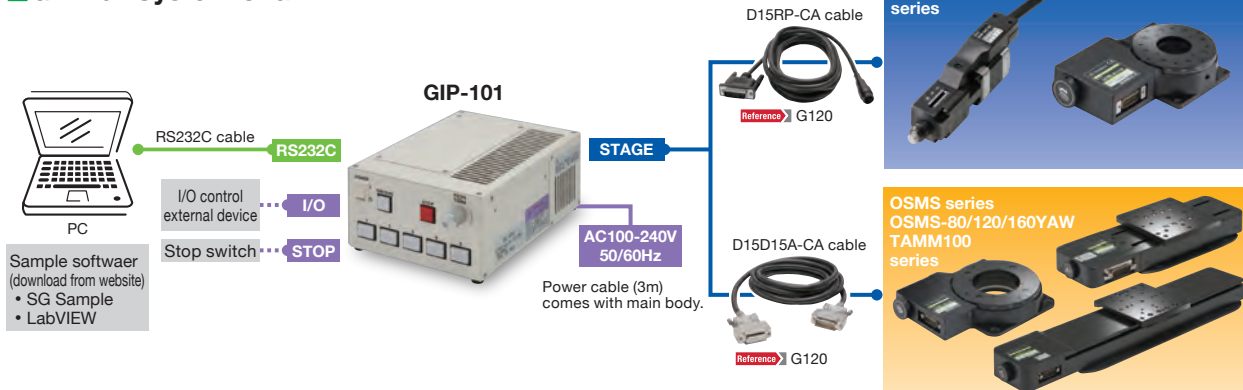

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 × 40 mm

60 × 60 mm

80 × 80 mm

85 × 85 mm

100 × 100 mm

120 × 120 mm

Others