

Microscope Objectives | OBL

RoHS

Catalog Code W3085

These objectives are educational microscope objectives. They are to the JIS standard (Japanese Industry Standard), have Short focal length, high NA and are fit for beam divergent use.

- Full color correction throughout the visible wavelength.
- The OBL-40 and OBL-60 have a built-in spring in the tip of the objective lens.
- These objective lenses are finite.
- To mount it to a microscope, a finite 160mm adaptor is required.
- The distance from the attachment face of the objective lens to the image is 150mm.



Guide


- ▶ Use a special filter (SFB) to correct the wave front distortion.
[WEB Reference](#) [Catalog Code](#) W4036
- ▶ Objective holder (LHO) is available for these objective lenses.
[WEB Reference](#) [Catalog Code](#) W4024
- ▶ Cross holder (TAT) is now available.
[WEB Reference](#) [Catalog Code](#) W4038

Attention

- ▶ Do not use objectives with high power laser.
- ▶ The objective lenses are finite and are not to be used with infinite lens barrel or poor images will result.
- ▶ To be used only in the visible wavelength range.

Outline Drawing

(in mm)

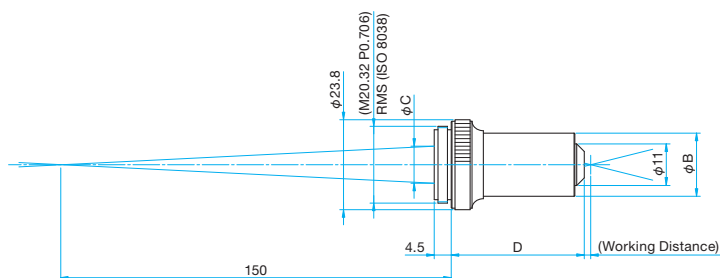

Specifications

Part Number	Magnification	Length D [mm]	Barrel diameter phi B [mm]	Pupil diameter phi C [mm]	Focal length f [mm]	NA	Working distance (WD) [mm]	Weight [kg]
OBL-10	10	30.5	phi 16.7	phi 8.3	16.6	0.25	5.5	0.05
OBL-20	20	35.2	phi 16.7	phi 7.1	9.0	0.40	1.7	0.05
OBL-40	40	36.4	phi 19.7	phi 5.8	4.5	0.65	0.6	0.06
OBL-60	60	36.7	phi 19.7	phi 4.9	2.91	0.85	0.3	0.07

Compatible Optic Mounts

LHO-20.32, -20.32A / TAT-180A + TAT16RO

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Achromats

Focusing Lenses

fθ Lenses

Objectives

Expanders

Others