

Carriers for Medium Optical Rails Feet for Large Optical Rails

CAA-LS/MB
OBT-LS/LW/WL


CAA-LS/MB

RoHS


Carriers mount on a medium optical rail, slide freely and can be locked in place at any location.

Outline Drawing


CAA-25LS/25LSEE/25LSUU

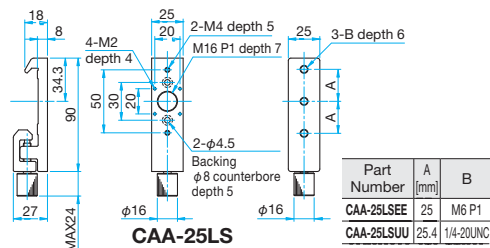


CAA-40LS

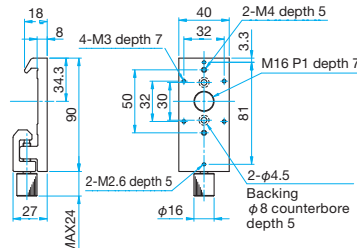


CAA-60LS




CAA-65LSEE/65LSUU

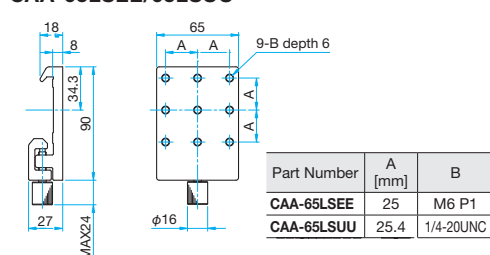

CAA-100LS

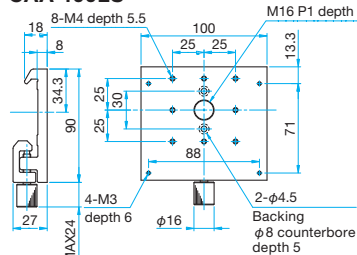

CAA-60MB



Specifications

Part Number			Primary material: Aluminum Finish: Black Anodized	
M4	M6	INCH	Compatible Optical Rails	Weight [kg]
CAA-25LS	CAA-25LSEE	CAA-25LSUU	Medium optical rails (OBA-SH) Medium low-profile optical rails (OBT-SH/SUU)	0.1
CAA-40LS	-	-		0.13
CAA-60LS	-	-		0.17
-	CAA-65LSEE	CAA-65LSUU		0.19
CAA-100LS	-	-		0.28
CAA-60MB	-	-		0.18

OBT

RoHS




- OBT is composed of a thin aluminum plate and adjustable feet. Attaches to OBT-LH/SH optical rails. It allows ± 10 mm of height adjustment.

Guide


- Two M4x6 mm socket head screws are needed when used with CAA-25LS.

Outline Drawing


OBT-LS



OBT-LW



OBT-WL



Specifications

Part Number		Primary material: Aluminum Finish: Black Anodized	
		Compatible Optical Rails	Weight [kg]
OBT-LS		Large low-profile optical rails (OBT-LH)	0.28
OBT-LW		Medium low-profile optical rails (OBT-SH)	0.33
OBT-WL		Large low-profile optical rails (OBT-LH)	0.24
		Medium low-profile optical rails (OBT-SH)	