

Used for rotary and regular cross clamps.

- Can be combined with other posts via a cross clamp or rotary cross clamp.
- The PO-12 model is secured with a 17 mm wrench on the flats of the external thread.
- The PO-20 model is secured using a wrench inserted into the through hole.





Guide

- Custom sizes not listed in the catalog can be made to print. Contact our Sales Division for more information. Use the Question Sheet for Special Order Posts.



Outline Drawing

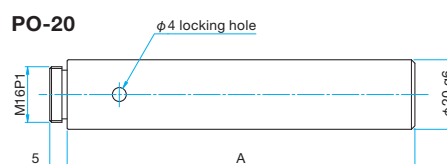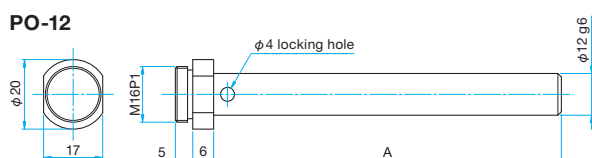

Specifications

			Primary material: Stainless Steel Finish: None
Part Number	Diameter [mm]	A [mm]	Weight [kg]
PO-12-100	φ12	100	0.11
PO-12-120		120	0.13
PO-12-150		150	0.15
PO-12-200		200	0.2
PO-12-250		250	0.24
PO-12-300		300	0.29
PO-12-400		400	0.38
PO-12-500		500	0.46
PO-20-100	φ20	100	0.25
PO-20-120		120	0.3
PO-20-150		150	0.37
PO-20-200		200	0.5
PO-20-250		250	0.62
PO-20-300		300	0.74
PO-20-400		400	0.99
PO-20-500		500	1.24



Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Vibration Isolation Systems

Optical Tables

Darkrooms/ Dark Boxes

Optical Bases

Posts

Brackets

Adapters

Tools