Technical parameters



Model: TC-6S

Types: Single core quartz optical fibers

Size: 75(W)*63(D)*64(H)mm

Weight: about 358G

Average angle: 0.5°

PLaced: 3-1 in multi - function fixture

Blade life: 48000 times

One side of the blade: 16 sides

Scale use: 1000s, each scale can be adjusted

3 times height



Cleave length: 5mm-20mm

Types: 0.25—1mm, tail fibers, leather cables

Core: Single core

Steps: 2





fiber cleaver TC-6S Precision and durable





TC - 6S


The fiber cleaver TC-6S adopts advanced aluminum alloy material and has high hardness, high precision performance, can be widely used in various construction occasions.





TC - 6S

Multi-functional three-in-one fixture, flxible and not easy to drop, so it is easy to operate.

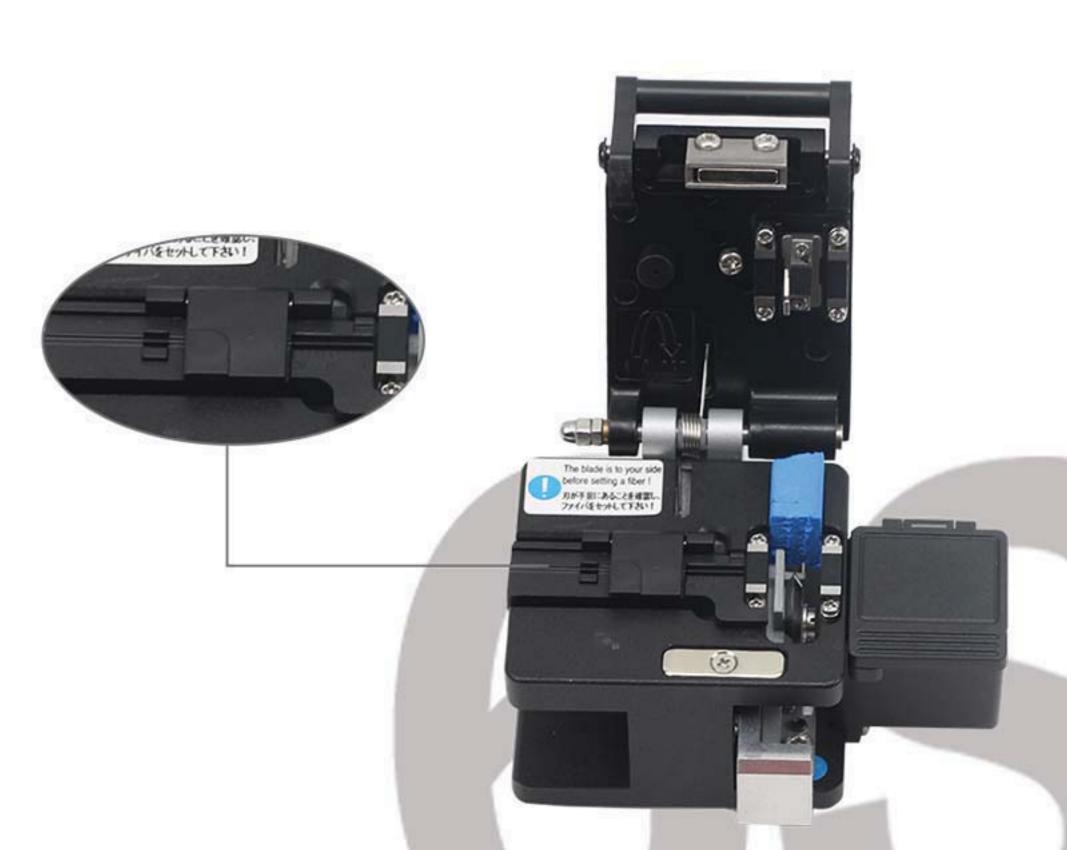



TC-68

Stable cleaving angle, smooth cleaving end surface, manual cleaving, automatic reset after cleaving.







The service life of the blade is 3000 times and the total service life of the blade can reach more than 48000 times.







Ingenious design of presser foot, lined with elastic sponge pads, without having to adjust the blade afterheight drop, it can still normal use with super shockproof function.







With Anti-breakage technology ,no longer disconnect the optical fiber when it is in the cold weather .





Product configurations





Equipped with shockproof and anti-fall hard bag, it is more convenient to carry.