



# ANALOG CABLES

PART NUMBER REFERENCE **ITC - A - X | X - X - X - ( ) | M**

## Select Connector Type: 1-8 End "1"


Gender, Body and Pin Count  
(from page 15) End "1"

## Connector Orientation:


See example at right

\* PLEASE NOTE: Right Angle orientations are available for connector types: 1, 2, 5 & 6

- Straight = 0
- Right Angle 360° = 1 \*
- Right Angle 45° = 2 \*
- Right Angle 90° = 3
- Right Angle 135° = 4
- Right Angle 180° = 5 \*
- Right Angle 225° = 6 \*
- Right Angle 270° = 7
- Right Angle 315° = 8



Example: Right Angle orientation #3 (90°)



## Cable Type Option:

- 24 AWG x 12C (I/O) = 1 \*
- ULTRAFLEX (Video) = 2 \*
- 28 AWG x 6C (I/O) = 3 \*
- 26 AWG x 8C (I/O) = 4 \*

## Select Connector Type: 1-8 End "2"

Gender, Body, and Pin Count  
(from page 15) End "2"

**X** on End "2" denotes flying leads

## Option: Length in Meters

- \* X End option for step "4" denotes flying leads for cable.
- \* Cable type 1 is only for End A types 1-4 going to End B flying leads (X).
- \* Cable type 2 is only available for end types 1-4.
- \* Customer specified pin-out/color code for flying leads
- \* Cable type 3 is only available for end types 5, 6 & Flying Leads.
- \* Cable type 4 is only available for end types 7, 8 & Flying Leads.
- \* Step 2: Right Angle options 1-8 will only be available for end types 1,2, 5 & 6
- \* Connector P/N is for reference only.

### Physical:

Cable Color:	Black
Shell Color:	Black
Shell Construction:	Pre-molded in Polyethylene, fully shielded and over-molded in black PVC.
Cable Construction:	Mini coaxial lines plus discrete wires for all standard RGB, HD and VD applications.

## CONNECTOR TYPE OPTIONS:

**1**



12 Pin Female Plug  
HR10A-10P-12S\*

**2**



12 Pin Male Plug  
HR10A-10P-12P\*

**3**



12 Pin Female Jack  
HR10A-10J-12S\*

**4**



12 Pin Male Jack  
HR10A-10J-12P\*

**5**



6 Pin Female Plug  
HR10A-7P-6S\*

**6**



6 Pin Male Plug  
HR10A-7P-6P\*

**7**




8 Pin Female Plug  
HR25-7TP-8S\*

**8**



8 Pin Male Plug  
HR25-7TP-8P\*

**X**

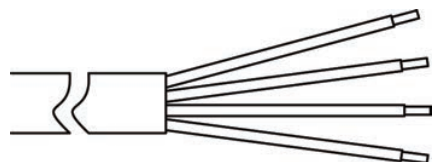

Flying Leads  
for End "2"

\* Connector P/N is for reference only.

See page 16 for profile drawings.

REV. C

