


CHUM-530M/C 5MP, 1" CMOS, USB 3.0 Camera

USBTM
VISION



CHUM-530M/C 5 MP 1" CMOS USB 3.0 Camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, logistics code reading, bottle inspection and medical packaging.


Key Features

- Supports auto exposure control, user defined LUT and gamma correction.
- Cameras can be synchronized with hard trigger and soft trigger. Different exposure modes supported.
- Compact structure with the size of 29mm×29mm×30mm, suitable for tight mounting requirement.
- The USB3.0 interface is tightly locked to prevent accidental unplugging and dropping.
- Compatible with USB 3.0 Vision V1.0.

Application Scenarios

- Electronic semiconductor
- Factory automation
- Logistics code reading
- Bottle inspection
- Medical packaging

Spectral Response

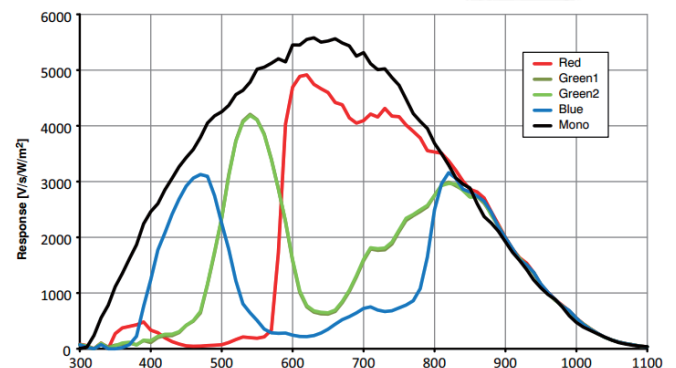

CHUM-530M/C Quantum Efficiency

Order Models

Mono: CHUM-530M

Color: CHUM-530C

Specifications

Model	CHUM-530M	CHUM-530C
Parameters	5MP, 1" CMOS, USB 3.0 Camera	
Camera		
Sensor	PYTHON 5000	
Pixel Size	4.8μm×4.8μm	
Sensor Size	1"	
Resolution	2592×2048	
Frame Rate	60fps	30fps
Dynamic Range	>60dB	
SNR	>40dB	
Gain Range	0-15dB	0-10dB
Exposure Time	59μs-10sec	
Shutter Mode	Global shutter. Auto-exposure, Manual exposure, and One-key exposure	
Data Interface	USB 3.0	
General Purpose I/O	Opto-isolated input x1, Opto-isolated output x1, Bi-directional non-isolated I/O x1	
Data Format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer BG 8/10/10p/12/12p, YUV422_YUYV_Packed, YUV422_Packed, RGB8
General		
Power	<3.5W@12VDC, Voltage 5~15VDC, USB 3.0 power supply supported	
Temperature	Working Temperature 0~50°C, Storage Temperature -30~70°C	
Humidity	20%-80% RH without condensation	
Dimension	29mm×29mm×30mm	
Weight	<56g	
Lens Interface	C-Mount	
Software	MVS or Third-Party Software supporting USB 3.0 Vision Protocol	
Operating System	Windows XP/7/10 32/64bits	
Compliance	USB 3.0 Vision	
Certification	CE, FCC, RoHS	

Recommended Accessories

- **Power:** 12VDC @1A power adapter
- **Cable:** Micro USB 3.0 cable (B Type) recommended

Dimensions

