

ATMS Series Translation Motorized Stages - 5 Phase Stepping Motor | ATMS46-(XY) RoHS CE

Application Systems

Machine Vision

Manual Positions

Motion Control Products

Optical & Mirror Holder

F A Parts

Measurement &Control

FA Electrical Parts

Tool & Measure

Cleanroom & AntiStatic

Index

Piezo Stage

Precision Linear MS

High Speed MS

Motorized Goniometer

Motorized Rotation

Multiaxis Motorized

Industrial Robot

Controller & Driver & Cable

Custom-Built MS

Stepping motor driven stages, ideal for positioning of measuring instruments or inspection tools from which high stiffness and high precision are required.



● U-shaped rail offers light weight, and minimized deflection to achieve high stiffness.

Guide

- ▶ Contact our International Sales Division if you desire to change motors, etc. [Reference](#) I019, I085 (Question Sheet)
- ▶ Dust-proof cover reel and grease change are optionally available. [Reference](#) I017, I018
- ▶ We will assemble your X axis stage with a newly purchased X axis stage at a separate cost.
- ▶ For the ATMS46-500(XY), carry-in fees will be charged separately. (Refer to the table on the right)

Specifications					
Part Number		ATMS46-300(XY)	ATMS46-400(XY)	ATMS46-500(XY)	
Mechanical Specifications	Travel [mm]	300	400	500	
	Table Size [mm]	120×124	120×124	120×124	
	Feed Screw [mm]	Ball screw diameter ϕ15mm, 10mm lead	Ball screw diameter ϕ15mm, 10mm lead	Ball screw diameter ϕ15mm, 10mm lead	
	Positioning Slide	Outer rail structure	Outer rail structure	Outer rail structure	
	Stage Top Material	Aluminum	Aluminum	Aluminum	
	Finish	Black anodized	Black anodized	Black anodized	
	Weight [kg]	21.6	24.8	28.0	
Accuracy Specifications	Resolution	(Full) [μm/pulse]	20	20	20
		(Half) [μm/pulse]	10	10	10
	MAX Speed [mm/sec]	120	120	120	
	Load Capacity [N]	186 (19.0kgf)	186 (19.0kgf)	186 (19.0kgf)	
	Backlash [μm]	3	3	3	
	Orthogonality of Motion [μm]	15	15	20	
Sensor	Sensor Part Number	Micro photo sensor: PM-L24 (SUNX Co., Ltd.)			
	Limit Sensor	Equipped (NORMAL CLOSE)	Equipped (NORMAL CLOSE)	Equipped (NORMAL CLOSE)	
	Origin Sensor	None	None	None	
	Proximity Origin Sensor	None	None	None	

Motor / Sensor Specifications		
Motor	Type	5-phase stepping motor 1.4A/phase (Tamagawa Seiki Co., Ltd.)
	Motor Part Number	TS3624N42E4 (□60mm)
	Step Angle	0.72°
Sensor	Power Voltage	DC5 – 24V ±10%
	Current Consumption	30mA or lower (15mA or lower per sensor)
	Control Output	NPN open collector output DC30V or lower, 50mA or lower
	Output Logic	When shaded: Output transistor OFF (no conduction)

(Reference) Precision Specifications of Single Axis Stage				
Part Number		ATMS46-300(X)	ATMS46-400(X)	ATMS46-500(X)
Accuracy Specifications	Positioning Accuracy [μm]		25	25
	Positional Repeatability [μm]		6	6
	Moment Stiffness	Pitch [°/N·cm]	0.05	0.05
		Yaw [°/N·cm]	0.04	0.04
		Roll [°/N·cm]	0.04	0.04
	Lost Motion [μm]		5	5
	Parallelism [μm]		50	50
	Running Parallelism [μm]		15	15

Compatible Driver / Controller		
Control System	Compatible Driver	SD-5M, SD-55M, SD-514MSC, SD-5151, SD-525M
	Compatible Controller	ASC-302GS, ASC-304GS

ATMS Series Translation Motorized Stages - 5 Phase Stepping Motor

ATMS46-(XY)

RoHS


CE



Outline Drawing


ATMS46-300(XY)

 Hexagon socket head cap screw M6x12...8 screws

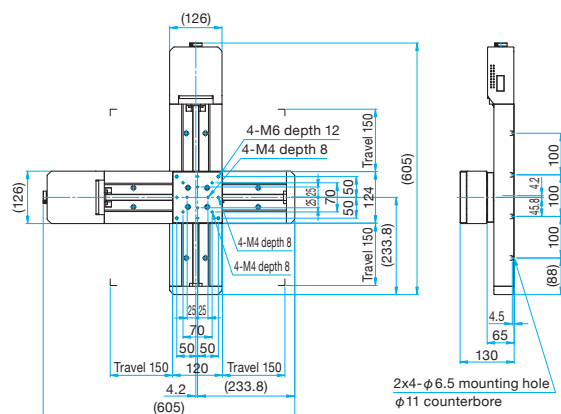


ATMS46-400(XY)


 Hexagon socket head cap screw M6x12...8 screws

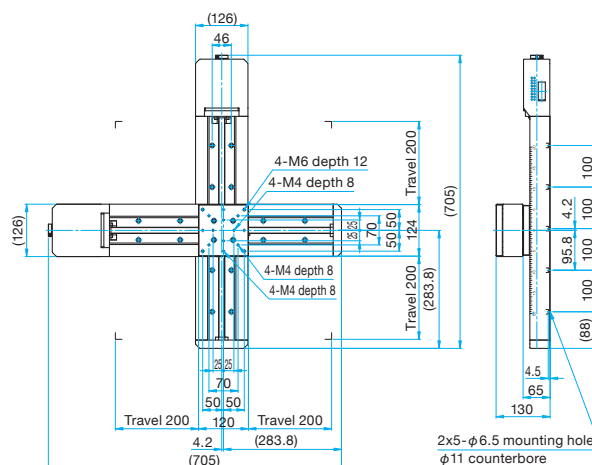**ATMS46-500(XY)**

 Hexagon socket head cap screw M6x12...10 screws

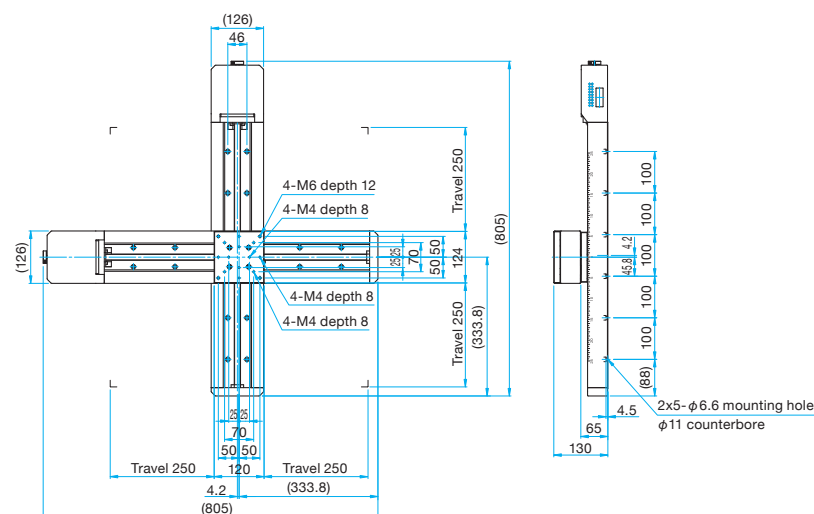


■ Connection Diagram

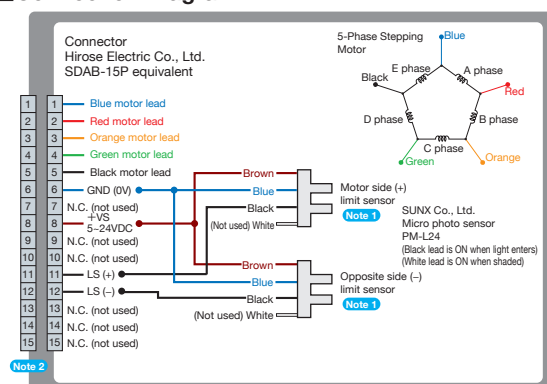

Note 1 The motor side limit sensor is the + direction limit sensor. Motorized stages are not fitted with origin and proximity origin sensors. Limit sensors are used as origin detection sensors.

Note 2 Compatible cable connector: DDK Ltd. 17JE-1350

Compatible Controllers / Drivers and Cables

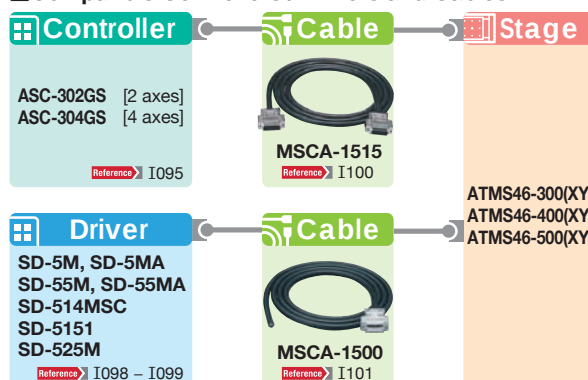

Application Systems

Machine
Vision

Manual Positions

Motion Control Products

Optical &
Mirror Holder

FA Parts

Measurement & Control

FA Electrical
Parts

Tool & Measure

Cleanroom
& AntiStatic

Index

Piezo Stage

Precision Linear MS

High Speed
MS

Motorized
Gonimeter

Motorized Rotation

Multiaxis

Industrial

Robot
Controller
Driver & Cab

Custom-Built
MS