
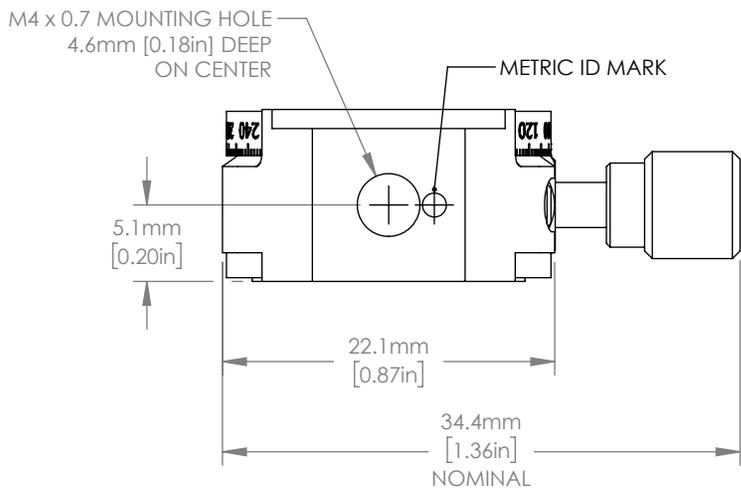


ACTUATOR PROVIDES
 $\pm 7^\circ$ OF FINE ADJUSTMENT
 2.0mm [5/64in] HEX

SETScrew ENGAGE
 FINE ADJUSTMENT
 1.3mm [0.05in] HEX
 (SEE NOTE)

SM05 ($\phi 0.535-40$) INTERNAL THREAD
 ACCEPTS $\phi 12.7$ mm [$\phi 0.50$ in] OPTICS
 5.8mm [0.23in] THICK
 (1) SM05RR RETAINING RING (INCLUDED)

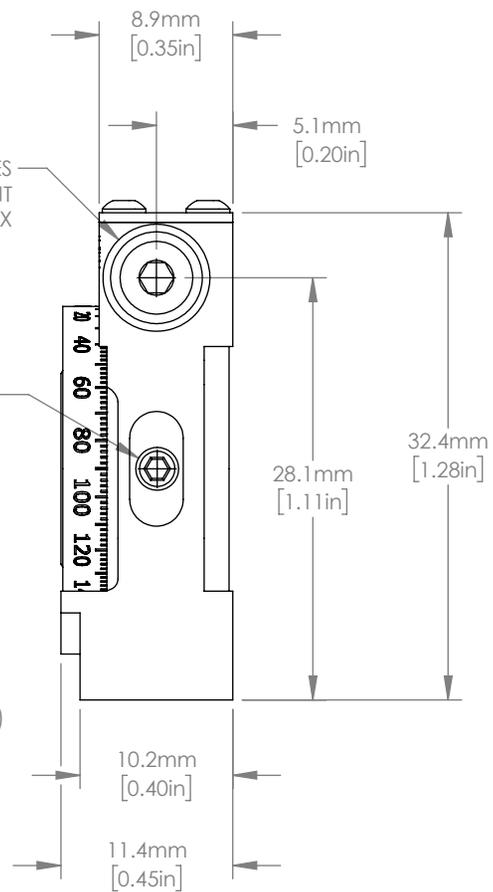

CAUTION:
 OVERTIGHTENING OF THE FINE ADJUSTMENT LOCK MAY PREVENT
 PROPER OPERATION OF THE FINE ADJUSTMENT ON THIS MOUNT

DRAWING PROJECTION			 www.hours-web.com	
NAME	DATE			
REDRAWN	02/FEB/16		METRIC $\phi 0.50$ in PRECISION ROTATION MOUNT	
APPROVAL	03/FEB/16		MATERIAL	REV E
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			N/A	
			ITEM #	APPROX WEIGHT
			PRM05/M	5.6 g

FOR INFORMATION ONLY
 NOT FOR MANUFACTURING PURPOSES