

Precision motorized stages with built-in compact optical scales make highly accurate and reliable full closed loop system using Sigma-Koki controllers (SHOT-302GS/304GS, HIT-M·HIT-S).



- U-shaped guide rail offers light weight, and minimized deflection to achieve high stiffness.
- Includes a compact scale built in while keeping the installation space the same as that of the equivalent open loop OSMS series.

Guide

- ▶ Contact our Sales Division for replacement of motors or for stabilizing (drop-preventing) mechanism.
[Reference](#) G017, G123 (Motorized Stage System Question Sheet)
[WEB Reference](#) [Catalog Code](#) W9500
- ▶ Grease change is optionally available.
[Reference](#) G122 [WEB Reference](#) [Catalog Code](#) W9006
- ▶ Contact our Sales Division to use the stage as an XY axis or a Z axis stage.

Specifications

Part Number		OSMS(CS)26-100(X)	OSMS(CS)26-200(X)	
Part Number (-M6)		OSMS(CS)26-100(X)-M6	OSMS(CS)26-200(X)-M6	
Part Number (-INCH)		OSMS(CS)26-100(X)-INCH	OSMS(CS)26-200(X)-INCH	
Mechanical Specifications	Travel [mm]	100	200	
	Stage Size [mm] (M6, INCH)	100×100 (120×120)	100×100 (120×120)	
	Feed Screw	Ball screw diameter φ8mm, 2mm lead	Ball screw diameter φ8mm, 2mm lead	
	Positioning Slide	Outer rail structure	Outer rail structure	
	Stage Material	Aluminum	Aluminum	
	Finish	Black anodized	Black anodized	
	Weight [kg]	3.2 / 3.4 / 3.4	4.2 / 4.5 / 4.5	
Accuracy Specifications	Resolution	(Full) [μm/pulse]	4	4
		(Half) [μm/pulse]	2	2
	MAX Speed [mm/sec]	40	40	
	Positioning Accuracy [μm]	10	15	
	Positional Repeatability [μm]	2	3	
	Load Capacity [N]	117 (12.0kgf)	117 (12.0kgf)	
	Moment Stiffness	Pitch [°/N·cm]	0.23	0.23
		Yaw [°/N·cm]	0.12	0.12
		Roll [°/N·cm]	0.2	0.2
	Lost Motion [μm]	3	5	
Backlash [μm]	3	3		
Parallelism [μm]	50	50		
Running Parallelism [μm]	10	10		
Pitch [°] / Yaw [°]	25/20	30/25		
Sensor	Sensor Part Number	Micro photo sensor: GP1S092HCPIF (Sharp Corporation)		
	Limit Sensor	Equipped (NORMAL CLOSE)	Equipped (NORMAL CLOSE)	
	Origin Sensor	Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)	
	Proximity Origin Sensor	Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)	
Scale head	Resolution [μm]	0.5	0.5	

Motor / Sensor Specifications

Motor	Type	5-phase stepping motor 0.75A/phase (Oriental Motor Co., Ltd.)
	Motor Part Number	PK525HPB-C4 (□28mm)
	Step Angle	0.72°
Sensor	Power Voltage	DC5 - 24V±10%
	Current Consumption	80mA or lower (20mA or lower per sensor)
	Control Output	NPN open collector output DC30V or lower, 50mA or lower
	Output Logic	When shaded: Output transistor OFF (no conduction) : Limit Sensor When shaded: Output transistor ON (conduction): Origin sensor, Proximity Origin Sensor
Scale head	Power Voltage / Current Consumption	DC5V±5% / 50mA

Compatible Cable

Cable	Driver Cable	D15D15A-CA
	Scale Cable	GSEF-CA-3

Compatible Driver / Controller

Control System	Compatible Driver	—
	Compatible Controller	SHOT-302GS, SHOT-304GS, HIT-M·HIT-S

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 x 40 mm

60 x 60 mm

80 x 80 mm

85 x 85 mm

100 x 100 mm



120 x 120 mm

Others





Outline Drawing

OSMS(CS)26-*(X) Hexagon socket head cap screw M4x10...10 screws (100)
Hexagon socket head cap screw M4x10...14 screws (200)

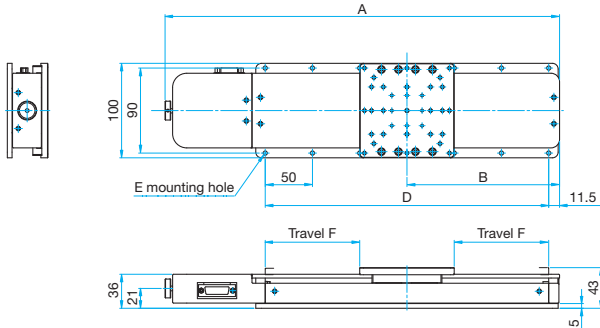



Part Number	A	B	C	D	E	F
OSMS(CS)26-100(X)	317.5	111.5	11.5	200 (50x4)	10-φ4.5	50
OSMS(CS)26-200(X)	417.5	161.5	11.5	300 (50x6)	14-φ4.5	100

OSMS(CS)26-*(X)-M6 Hexagon socket head cap screw M6x10...10 screws (100)
Hexagon socket head cap screw M6x10...14 screws (200)

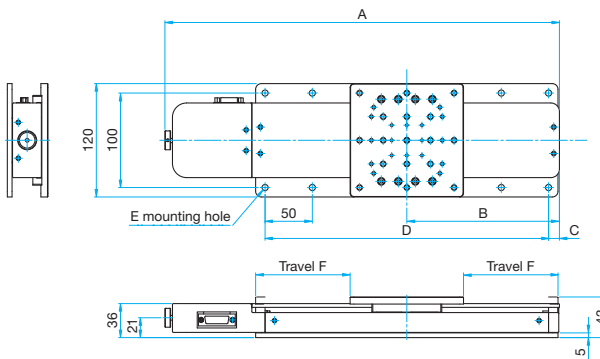


Part Number	A	B	C	D	E	F
OSMS(CS)26-100(X)-M6	317.5	111.5	11.5	200 (50x4)	10-φ6.5	50
OSMS(CS)26-200(X)-M6	417.5	161.5	11.5	300 (50x6)	14-φ6.5	100

OSMS(CS)26-*(X)-INCH Hexagon socket head cap screw 1/4-20UNCx3/8...10 screws (100)
Hexagon socket head cap screw 1/4-20UNCx3/8...14 screws (200)

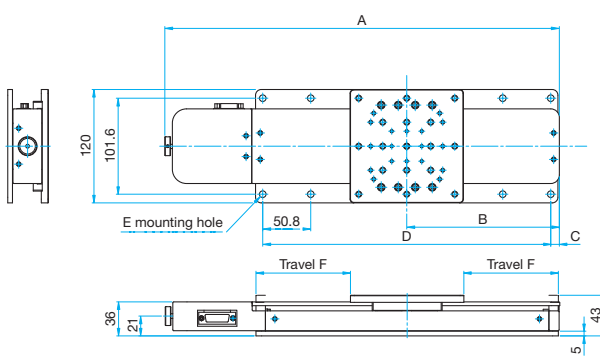

Part Number	A	B	C	D	E	F
OSMS(CS)26-100(X)-INCH	317.5	111.5	9.9	203.2 (50.8x4)	10-φ7	50
OSMS(CS)26-200(X)-INCH	417.5	161.5	9.1	304.8 (50.8x6)	14-φ7	100

Compatible Controllers / Drivers and Cables

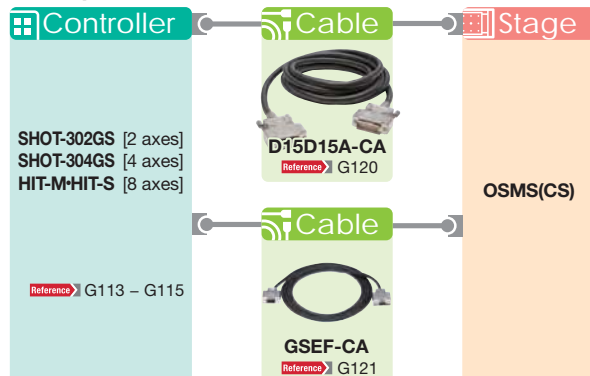

Application Systems
Optics & Optical Coatings
Opto-Mechanics
Bases
Manual Stages
Actuators & Adjusters

Motoeized Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

- 40 × 40 mm
- 60 × 60 mm
- 80 × 80 mm
- 85 × 85 mm
- 100 × 100 mm
- 120 × 120 mm
- Others