


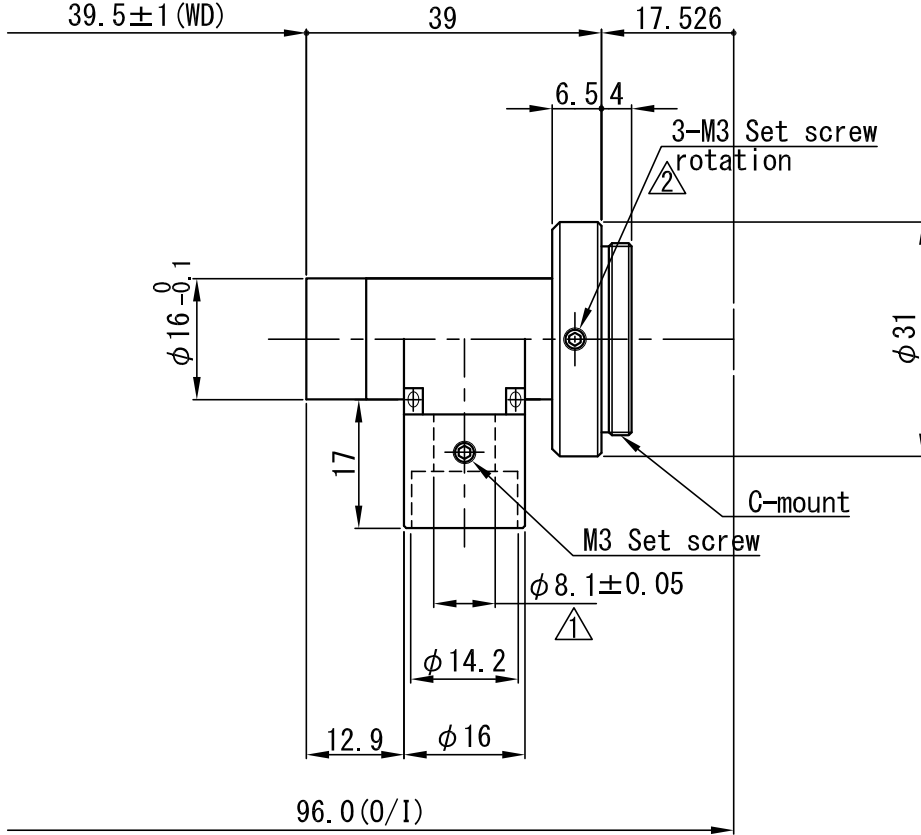

					NO.×箇所	REVISION 訂正事項	DATE	NAME	APPROVED	CHECKED	MATERIAL 材料	TREATMENT 処理	TREATMENT CONTACT 処理接点	OVER 250 UP TO 1000	±0.3	±0.5	±1.0	±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)	QUANTITY 個数
									T. A.	T. A.				OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15					
														OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1					
														OVER 0 UP TO 16	±0.05	±0.1	±0.2	±0.1					
									T. T.	M. Y.				TOLERANCES	A	B	C	S	SCALE	1 / 1	NAME	DRAWING / 外觀図	
																			DATE	11.05.11	DRAW NO.	01DTC0007A3	

05-Feb-16
SPTC0007A2

Standard Telecentric Lens

Model		TVL2-40CO			
Optical Mag.		× 2.0 ± 5 %			
FOV (V x H)	2/3"	-			
	1/2"	2.4	×	3.2	mm
	1/3"	1.8	×	2.4	mm
WD		39.5 mm ± 1			
O/I (Object & Imager Distance)		96.0 mm			
Working F/#		15.0			
NA		0.067			
DOF at PCoC ϕ 0.04mm		0.3 mm			
TV Distortion (1/2")		0.00 %			
Relative Illuminance (Y=4)		84 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		1/2"			
Co-Axial Prism		Built-in			
Weight (approx.)		35 g			
Dimension		ϕ 31 (max.)	×	L =	39 mm